

HL series

High-load

(Suitable for large objects)



Model	HL-4265-050	HL-4265-100	HL-5280-200	HL-5280-400
Capacity	20~6500 g	40~15000 g	100~25000 g	200~40000 g
Accuracy(3σ) ¹	±2 g	±4 g	±5 g	±10 g
Max.throughput ¹	80 pcs/min	80 pcs/min	52 pcs/min	52 pcs/min
Resolution	0.5 g	1 g	1 g	2 g
Product	Length	110~500 mm	110~500 mm	110~650 mm
	Width	5~400 mm	5~400 mm	5~500 mm
	Height	5~500 mm	5~500 mm	5~500 mm
Belt speed	16~50 m/min	16~50 m/min	16~50 m/min	16~50 m/min
Belt height	750±50 mm			
Classification	1 or 2			
Display (HMI)	10.1 inch color TFT LCD display , Touch panel			
Preset memory	Maximum 199			
Power supply	AC220V±10% , single phase , 50/60 Hz , 0.4kw			
Environmental conditions	temperature : 0°C~40°C relative humidity : 10~90% non-condensing			
Protection class	IP54 compliance			
Exterior	Stainless steel SUS304 hair line (excluding some parts)			
Data output	RS-232 , RS-485 , Ethernet , USB(2.0) port			

1.The speed and accuracy vary according to the products to be weighed and the rejector.

Rejector

Dual flipper



Pusher



Flipper



Roller with pusher




Flipper




Drop down



Pusher

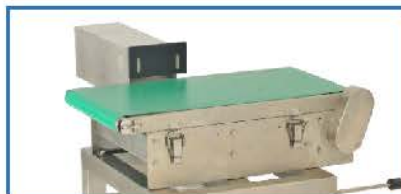

Air Jet

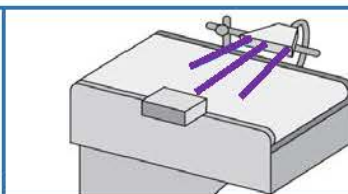

Pusher

